


M88系列：寬厚板專用電磁鐵。

M88Series :For handling width-thickness sized steel plates.

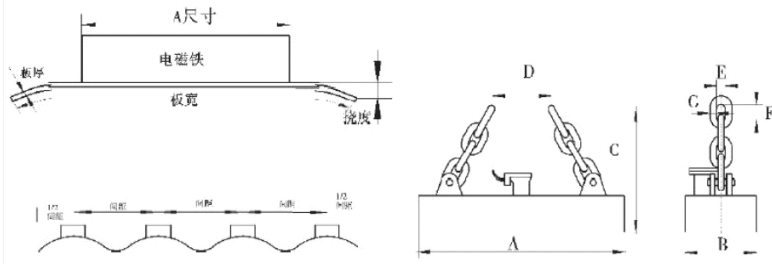

350型 Style 350

可搬運鋼板張數: 1張 Guaranteed transporting pieces:1

型號 Model	外形尺寸 overall dimension (mm)							品質 Mass (kg)	電流 Current (A)	功率 Power (kW)	鋼板厚度 Thickness (mm)				
	A	B	C	D	E	F	G				6	8	10	12	16
M88-10535L/G	1050	350	960	400	110	180	25	330	4.1	0.9	2650	3150	3350	3550	4050
M88-14035L/G	1400		940	500	110	180	25	430	5.45	1.2	3000	3500	3700	3900	4400
M88-17535L/G	1750		940	700	110	180	25	510	6.81	1.5	3350	3850	4050	4250	4750
M88-21035L/G	2100		920	800	110	180	25	600	8.18	1.8	3700	4200	4400	4600	5100
M88-25035L/G	2500		920	800	110	180	28	720	11.8	2.6	4050	4550	4750	4950	5450
M88-27035L/G	2700		980	900	110	180	28	890	13.5	3	4300	4800	5000	5200	5750
M88-28035L/G	2800		980	900	110	180	28	1100	15	3.3	4400	4900	5100	5300	5850
M88-32035L/G	3200		980	900	110	180	32	1250	20.5	4.5	4800	5300	5500	5700	6250

可搬運鋼板張數: 鋼板厚度 ≤ 10mm 可搬運 2 張, 鋼板厚度 > 10mm 可搬運 1 張  
 Guaranteed transporting pieces: Thickness ≤ 10mm, Guaranteed 2 pieces, Thickness > 10mm, Guaranteed 1 piece.

LM88系列400型

型號 Model		外形尺寸 overall dimension (mm)							品質 Mass (kg)	電流 Current (A)	功率 Power (kW)	鋼板厚度 Thickness (mm)				
		A	B	C	D	E	F	G				6	8	10	12	16
常溫用 (100°C 以下) normal temperature (below 100°C)	M88-13040L	1300	400	890	400	110	180	25	550	9.1	2	3000	3500	3700	4000	4500
	M88-17040L	1700		970	500	110	180	25	690	10	2.2	3400	3900	4100	4400	4900
	M88-21040L	2100		996	600	120	180	25	840	13.6	3	3800	4300	4500	4800	5300
	M88-25040L	2500		1015	700	120	180	28	910	18.2	4	4200	4700	4900	5200	5700
	M88-27040L	2700		1035	800	130	190	28	1200	20.1	4.5	4400	4900	5100	5400	5900
	M88-28040L	2800		1050	900	130	190	28	1350	21.8	4.8	4500	5000	5200	5500	6000
	M88-32040L	3200		1120	1000	140	200	32	1550	25	5.5	4900	5400	5600	5900	6400
	M88-43040L	4300		1210	1100	140	200	32	2100	32.8	7.2	6000	6500	6700	7000	7500
高溫用 (600°C 以下) high temperature (below 600°C)	M88-13040L/G	1300	900	400	110	180	25	580	8.6	1.9	3000	3500	3700	4000	4500	
	M88-17040L/G	1700	980	500	110	180	25	725	9.5	2.1	3400	3900	4100	4400	4900	
	M88-21040L/G	2100	1005	600	120	180	25	880	13	2.9	3800	4300	4500	4800	5300	
	M88-25040L/G	2500	1025	700	120	180	28	955	18.2	4	4200	4700	4900	5200	5700	
	M88-27040L/G	2700	1055	800	130	190	28	1260	19	4.2	4400	4900	5100	5400	5900	
	M88-28040L/G	2800	1070	900	130	190	28	1415	21	4.6	4500	5000	5200	5500	6000	
	M88-32040L/G	3200	1140	1000	140	200	32	1630	24	5.3	4900	5400	5600	5900	6400	
	M88-43040L/G	4300	1230	1100	140	200	32	2200	31	6.8	6000	6500	6700	7000	7500	
M88-53040L/G	5300	1280	1200	160	210	36	2730	38	8.4	7000	7500	7500	7500	7500		

可搬運鋼板張數: 鋼板厚度 ≤ 10mm 可搬運 4 張, 10mm < 鋼板厚度 ≤ 16mm 可搬運 3 張, 16mm < 鋼板厚度 ≤ 25mm 可搬運 2 張, 鋼板厚度 > 25mm 單張吊運  
 Guaranteed transporting pieces: Thickness ≤ 10mm, Guaranteed 4 pieces, 10mm < Thickness ≤ 16mm, Guaranteed 3 piece, 16mm < Thickness ≤ 25mm, Guaranteed 2 pieces, Thickness > 25mm, Guaranteed 1 piece

LM88系列500型

型號 Model		外形尺寸 overall dimension (mm)							品質 Mass (kg)	電流 Current (A)	功率 Power (kW)	鋼板厚度 Thickness (mm)				
		A	B	C	D	E	F	G				6	8	10	12	16及以上 (16and upon 16)
常溫用 (100°C 以下) normal temperature (below 100°C)	M88-13050L	1300	500	910	400	110	180	25	685	13	2.9	3000	3500	3700	4000	4500
	M88-17050L	1700		990	500	110	180	25	860	17	3.7	3400	3900	4100	4400	4900
	M88-21050L	2100		1015	600	120	180	25	1050	20	4.4	3800	4300	4500	4800	5300
	M88-25050L	2500		1035	700	120	180	28	1135	23	5	4200	4700	4900	5200	5700
	M88-27050L	2700		1055	800	130	190	28	1500	26	5.7	4400	4900	5100	5400	5900
	M88-28050L	2800		1070	900	130	190	28	1685	27	5.9	4500	5000	5200	5500	6000
	M88-32050L	3200		1140	1000	140	200	32	1940	29	6.3	4900	5400	5600	5900	6400
	M88-43050L	4300		1230	1100	140	200	32	2625	39	8.5	6000	6500	6700	7000	7500
高溫用 (600°C 以下) high temperature (below 600°C)	M88-13050L/G	1300	920	400	110	180	25	720	12	2.6	3000	3500	3700	4000	4500	
	M88-17050L/G	1700	1000	500	110	180	25	900	16	3.5	3400	3900	4100	4400	4900	
	M88-21050L/G	2100	1025	600	120	180	25	1100	19	4.1	3800	4300	4500	4800	5300	
	M88-25050L/G	2500	1055	700	120	180	28	1190	22	4.8	4200	4700	4900	5200	5700	
	M88-27050L/G	2700	1075	800	130	190	28	1575	25	5.5	4400	4900	5100	5400	5900	
	M88-28050L/G	2800	1090	900	130	190	28	1770	26	5.7	4500	5000	5200	5500	6000	
	M88-32050L/G	3200	1160	1000	140	200	32	2040	28	6.1	4900	5400	5600	5900	6400	
	M88-43050L/G	4300	1250	1100	140	200	32	2750	37	8.1	6000	6500	6700	7000	7500	
M88-53050L/G	5300	1300	1200	160	210	36	3410	46	10.1	7000	7500	7500	7500	7500		