


M12、M15、M22系列吊運捆紮棒材用電磁鐵：本系列產品為強透磁磁路設計，能穿透多層氣隙；適應吊運捆紮棒材；也可吊運大型鋼錠或鋼錠模。

Lifting Electromagnet Model Series M12、M15、M22 for Handling Bundled Bar Materials: This product series is designed as strong permeable magnetic circuit which can penetrate several layers of airspace ; suitable for lifting and transferring bundled bar materials as well as heavy duty steel ingots or steel moulds.

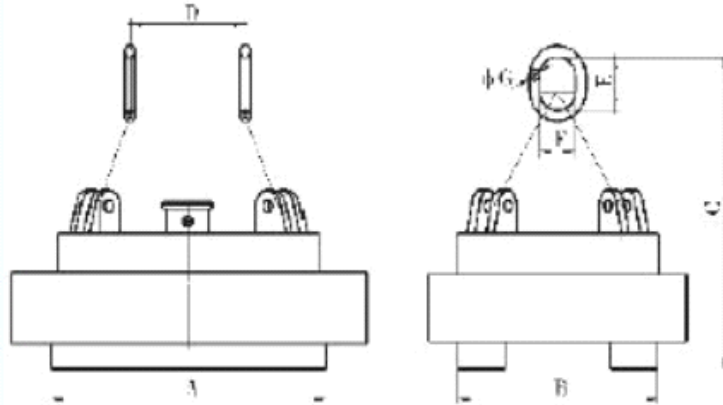

主要技術參數 Main technical data

DC-220V, TD-60%

型號 Model		M12-11060L/2-6	M12-12060L/2-6	M22-15090L/2-6	M22-15095L/2-6	M15-18060L/2-6	M15-26060L/2-6
外形尺寸 overall dimension (mm)	A	1140	1200	1500	1500	1800	2600
	B	600	600	930	950	605	605
	C	1050	1100	1020	1020	1750	1700
	D	400	400	650	650	1200	2000
	E	210	210	250	250	280	280
	F	125	125	175	175	175	175
	G	40	40	50	50	70	70
品質 Mass (kg)		1515	1680	1980	2160	2180	3139
冷態電流 Cold-state Current (A)		37.5	40.4	43.1	43.2	44	51.5
冷態功率 Cold-state Power (kw)		8.25	8.89	9.55	9.5	9.68	11.3
4臺起吊能力舉例 Example for lift capacity of four unit	棒材直徑 (mm) Bar material Diameter	Φ15~Φ51	Φ15~Φ51	Φ12~Φ50	Φ15~Φ51	Φ15~Φ51	Φ15~Φ51
	單捆直徑 (mm) Single bundle diameter	Φ230~Φ300	Φ300	Φ300~Φ350	Φ300	Φ230~Φ300	Φ300
	長度 (mm) length	6~12m	8m	9~12m	9~12m	6~12m	9~12m
	每捆重量 (t) Weight per bundle	2~3	2.6	2~3.5	2.5	2	2.3
	吊運捆數 Bundle amount for lifting	3	3	2~4	4	6	8