


M29系列吊運捆紮鋼管用電磁鐵：1. 磁極結構為扁平狀，適合搬運各種外徑、長度、捆數的捆紮鋼管。2. 磁極面無突起，不會損害鋼管表面。3. 操作靈活，一次可吊一捆至數捆。

Lifting electromagnet series M29 for handling bundled steel tubes:1.The shape of magnetic pole is flat.It is suitable for transporting bunched steel pipes with various kinds of outside diameter, length and quantity.2.The surface of magnetic pole is even,so the surface of steel pipe will not be damaged.3.Flexible operation.It can lift one to several bunches at a time.

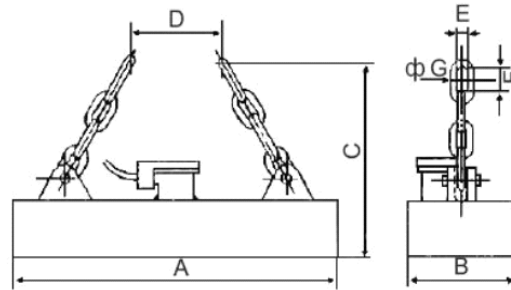

主要技術參數 Main technical data for M29

DC-22V, TD-60%

型號 Model	外形尺寸 overall dimension(mm)							品質 Mass (kg)	功率 Power (kW)	起吊能力 (直徑×長度) 兩臺聯用 example for lifting capacity (Diameter×length) combination of two electromagnets
	A	B	C	D	E	F	G			
M29-10060L	1000	600	1000	500	100	170	32	900	5	1/2英寸-4英寸×6500單捆直徑約Φ500mm 單捆重量:1000kg diameter of each punch is about Φ500mm weight of each punch 1000kg
M29-15060L	1500	600	1100	500	100	170	32	1300	7.5	Φ16-Φ75×3600單捆直徑約Φ600mm 單捆重量:1000kg diameter of each punch is about Φ600mm weight of each punch 1000kg
M29-12070L	1200	700	1000	500	100	170	32	1800	8.5	Φ10-Φ140×4000-8000單捆直徑約Φ500mm單捆重量:1000kg 並排2捆 (Φ150-Φ500×5500-12000並排2捆) diameter of each punch is about Φ500mm weight of each punch 1000kg two bunches side by side
M29-22070L	2200	700	1500	700	125	170	38	3500	15	Φ10-Φ140×4000-8000單捆直徑約Φ500mm單捆重量:1000kg 並排4捆 (Φ150-Φ500×5500-12000並排4捆) diameter of each punch is about Φ500mm weight of each punch 1000kg four bunches side by side