M16、M24、M36系列：本系列產品主要使用於冷軋和熱軋板廠吊裝各類鋼卷，分為立卷吊運型、臥卷吊運型和立臥通用型三種結構形式。
立卷吊運型---電磁鐵吸附鋼卷端面。當立卷端面不平整且高低差≤80mm時，電磁鐵採用活動磁極結構，活動磁極能很好的與立卷端面接觸，確保電磁鐵吊運能力。
臥卷吊運型---電磁鐵吸附鋼卷的弧形側面。電磁鐵能將鋼卷緊密的堆碼在一起，提高場地利用率。
立臥通用型---電磁鐵能吸吊立卷，也能吸吊臥卷。電磁鐵磁極結構既能適應立卷端面，又能適應臥卷的弧形側面。確保立卷、臥卷的安全吊運。

M16、M24、M36Series:This series of products are divided into three kinds of structure patterns,such as vertical lifting electromagnet,horizontal lifting electromagnet and vertical/horizontal lifting electroagnet.
Vertical lifting electromagnet---can absorb vertical steel roll's terminal surface.While the vertical steel roll's terminal surface uneven with the height difference≤80mm,the electromagnet adopts the activity magnetic pole structure,activity magnetic pole can well keep in touch with the vertical steel roll's terminal surface to guarantee the ability of transporting.
Horizontal lifting electromagnet---can absorb the arc side of the steel rolls.It can pile the steel rolls together closely,improve the utiliztion ratio of the yard.
Vertical/horizontal lifting electromagnet---can lift both vertical/horizontal steel rolls.The magnetic pole structurecan not only adapt to vertical steel roll's terminal surface but also adapt to the arc side of the horzontal steel roll to guarantee the security of transporting.

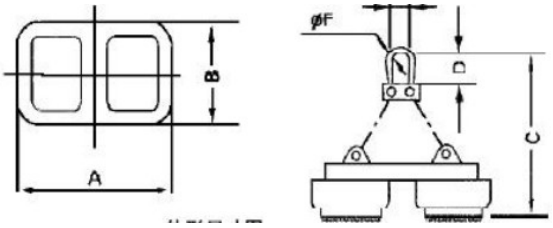

主要技術參數 Main technical data　　吊運方式：立臥通用型 Used vertically or horizontally　　TD-50%

型號 Model			M16-120100L/G	M16-140120L/G	M16-170140L/G	M16-180160L/G	M16-195170L/G	M16-210180L/G	M16-230190L/G
外形尺寸overall dimension	A	mm	1200	1400	1700	1800	1950	2100	2300
	B	mm	1000	1200	1400	1600	1700	1800	1900
	C	mm	1500	1600	1650	1650	1700	1800	2000
	D	mm	300	300	300	300	300	450	500
	E	mm	180	180	180	180	180	250	250
	F	mm	60	70	75	75	75	90	110
品質（Mass）		kg	3750	6000	7400	11600	12500	16000	19000
電壓（Voltage）		V	220	220	220	220	220	220	220
電流（冷態）（Current）		A	48	48	95	100	120	140	160
功率（冷態）（Power）		kW	10.5	17.2	20.9	22	26.4	30.8	35.2
最大重量（Weight）		t	7.5	10	16	22	28	32	45
最大外徑（Outside diameter）		mm	1250	1500	1850	1900	2100	2300	2500
寬度（Width）		mm	不限unlimited	不限unlimited	不限unlimited	不限unlimited	不限unlimited	不限unlimited	不限unlimited

主要技術參數 Main technical data　　吊運方式：立式吊運 vertically lift　　TD-50%

型號 Model			M24-210L/G	M24-150L/G	M24-165L/G	M24-180L/G	M24-195L/G	M24-210L/G
外形尺寸overall	A	mm	1570	1770	1940	2050	2180	2590
	B	mm	1550	1550	1600	1650	1650	1850
	C	mm	280	280	280	280	280	350
	D	mm	180	180	180	180	180	250
	E	mm	60	60	70	70	85	100
品質（Mass）		kg	3200	3600	5500	6600	7800	10000
電壓（Voltage）		V	220	220	220	220	220	220
電流（冷態）（Current）		A	40	50	80	90	93	100
功率（冷態）（Power）		kW	8.8	11	17.6	19.8	20.5	22
最大重量（Weight）		t	8	10	16	20	25	30
最大外徑（Outside diameter）		mm	1500	1500	1700	1800	1900	2000
寬度（Width）		mm	不限unlimited	不限unlimited	不限unlimited	不限unlimited	不限unlimited	不限unlimited

主要技術參數 Main technical data　　吊運方式：立式吊運 Vertically lift　　TD-50%

型號 Model			M36-210L/G	M36-230L/G	M36-250L/G	M36-270L/G	M36-290L/G	M36-320L/G
外形尺寸overall	A	mm	2280	2550	2750	2900	3100	3400
	B	mm	2000	2000	2200	2500	2500	2800
	C	mm	350	350	500	500	500	800
	D	mm	200	200	250	250	250	300
	E	mm	90	90	110	110	110	120
品質（Mass）		kg	9500	11000	14000	16000	17200	19000
電壓（Voltage）		V	220	220	220	220	220	220
電流（冷態）（Current）		A	100	113.6	127.3	136.4	150	175
功率（冷態）（Power）		kW	22	25	28	30	33	38.5
最大重量（Weight）		t	32	38	45	52	60	75
最大外徑（Outside diameter）		mm	2100	2300	2500	2700	2900	3200
寬度（Width）		mm	不限unlimited	不限unlimited	不限unlimited	不限unlimited	不限unlimited	不限unlimited