


M22系列：適用於吊運鋼錠和大型初軋坯、型鋼等。針對不同類型的鋼材採用不同的磁路設計。該系列產品又分工字鋼、初軋坯、梁坯、成卷線材（盤圓）起吊用電磁鐵。

M22Series: Suitable for lifting and transferring steel ingots, large blooming billet, rolled-steel section and etc. Different magnetic circuit designs are optional for different kinds of steel products. This product include lifting electromagnet for handling double T-steel, blooming billets, girder billets and coiled wire stock (round coil).

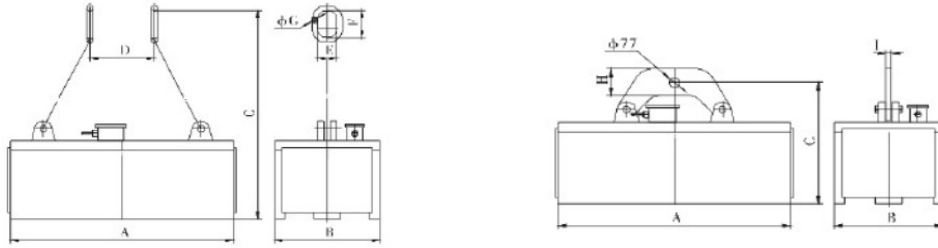

M22吊鋼坯常溫型技術參數 Technical data for normal temperature type

DC-220V, TD-50%

型號 Model		M22-8080L/1-6	M22-12595L/1-6	M22-14095L/1-6	M22-15095L/1-6	M22-16080L/1-6	M22-17065L/1-6	M22-20090L/1-6	
外形尺寸overall dimension (mm)	A	800	1250	1400	1500	1600	1700	2000	
	B	880	950	960	950	830	650	930	
	C	505	1100	1030	455	750	730	1720	
	D	\	400	450	\	\	\	0	
	E	\	175	175	\	\	\	230	
	F	\	250	250	\	\	\	370	
	G	\	50	50	\	\	\	75	
	H	200	\	\	200	200	200	\	
	I	45	\	\	50	50	50	\	
品質Mass (kg)		1380	2300	2640	2700	2600	2720	3690	
冷態電流 Cold-state Current (A)		24	39	45.5	47	44	42.6	59.9	
冷態功率Cold-state Power (kw)		5.3	8.58	10	10.34	9.6	9.4	13.2	
單臺起吊能力 Lifting capacity of one unit	吊運90~120mm方坯能力 (t) Lifting capacity for 90~120mm square billets (t)	4.1	7.7	8.6	9.2	8.32	7.2	11.7	
	方坯 Square billets	120mm×120mm	7.2m×5	8.5m×8	8.4m×9	8.1m×10	6.6m×11	5.8m×11	6.9m×15
		150mm×150mm	5.8m×4	7.2m×6	6.9m×7	6.5m×8	5.2m×9	4.2m×10	6.6m×10
		200mm×200mm	4.4m×3	4.9m×5	4.5m×6	4.8m×6	3.8m×7	3.3m×7	4.6m×8
	圓坯 Round billets	Φ200	5.5m×3	6.5m×5	6.5m×6	6.7m×7	6.3m×7	5m×7	6.1m×8
軌梁Track beam	50kg/m重軌 50kg/m heavy track	6.56m×5	8m×7	7.6m×9	7.8m×9	6.6m×10	5.2m×11	7.2m×13	

M22吊鋼坯高溫型技術參數 Technical data for high temperature type

DC-220V, TD-50%

型號 Model		M22-8080L/2-6	M22-12595L/2-6	M22-14095L/2-6	M22-15095L/2-6	M22-16080L/2-6	M22-17065L/2-6	M22-20090L/2-6	
外形尺寸overall dimension (mm)	A	800	1250	1400	1500	1600	1700	2000	
	B	880	950	950	950	830	650	930	
	C	565	1190	680	505	820	770	1720	
	D	\	400	\	\	\	\	400	
	E	\	175	\	\	\	\	230	
	F	\	250	\	\	\	\	370	
	G	\	50	\	\	\	\	75	
	H	200	\	200	200	200	200	\	
	I	45	\	50	50	50	50	\	
品質Mass (kg)		1600	2650	2750	2900	3100	3160	3800	
冷態電流 Cold-state Current (A)		21.6	33.6	34.6	34.2	39.2	32	49	
冷態功率Cold-state Power (kw)		4.8	7.4	7.61	7.52	8.6	7	10.8	
單臺起吊能力 Lifting capacity of one unit	吊運90~120mm方坯能力 (t) Lifting capacity for 90~120mm square billets (t)	4.1	7.7	8.6	9.2	8.32	7.2	11.7	
	方坯 Square billets	120mm×120mm	7.2m×5	8.5m×8	8.4m×9	8.1m×10	6.6m×11	5.8m×11	6.9m×15
		150mm×150mm	5.8m×4	7.2m×6	6.9m×7	6.5m×8	5.2m×9	4.2m×10	6.6m×10
		200mm×200mm	4.4m×3	4.9m×5	4.5m×6	4.8m×6	3.8m×7	3.3m×7	4.6m×8
	圓坯 Round billets	Φ200	5.5m×3	6.5m×5	6.5m×6	6.7m×7	6.3m×7	5m×7	6.1m×8
軌梁Track beam	50kg/m重軌 50kg/m heavy track	6.56m×5	8m×7	7.6m×9	7.8m×9	6.6m×10	5.2m×11	7.2m×13	